


10. Clutch Pedal


A: REMOVAL

- 1) Remove the steering column. <Ref. to PS-20, REMOVAL, Tilt Steering Column.>
- 2) Disconnect the connectors from stop light and clutch switches.
- 3) Remove the snap pins which secure lever to push rod and operating rod.
- 4) Remove the clevis pins which secure lever to push rod and operating rod.

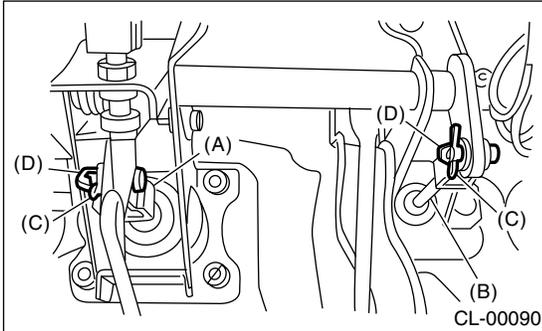

- (A) Operating rod
- (B) Push rod
- (C) Snap pin
- (D) Clevis pin

- 5) Remove the air cleaner case and intake duct. (Non-turbo model) <Ref. to IN(H4SO)-5, REMOVAL, Air Cleaner Case.> and <Ref. to IN(H4SO)-6, REMOVAL, Air Intake Duct.>
- 6) Remove the intercooler. (Turbo model) <Ref. to IN(H4DOTC)-10, REMOVAL, Intercooler.>
- 7) Remove the nut which secures clutch master cylinder.

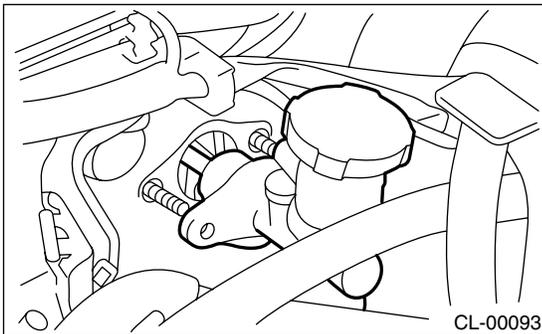

- 8) Remove the bolts and nuts which secure brake and clutch pedals, and remove the pedal assembly.

B: INSTALLATION

- 1) Install in the reverse order of removal.


CAUTION:

- Be careful not to kink the accelerator cable.
- Always use new clevis pins.

- 2) Adjust the clutch pedal after installation. <Ref. to CL-28, ADJUSTMENT, Clutch Pedal.>


C: DISASSEMBLY

- 1) Remove the clips, assist spring, rod and bushing.

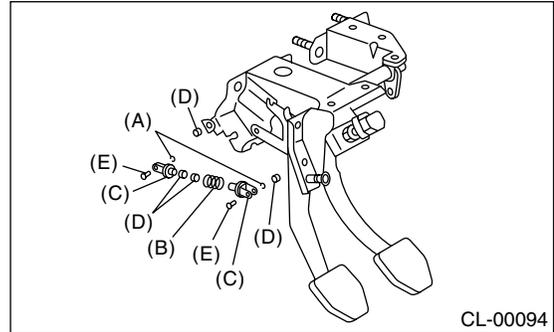


- (A) Clip
- (B) Assist spring
- (C) Assist rod
- (D) Bushing
- (E) Clevis pin

- 2) Remove the spring pin and lever.

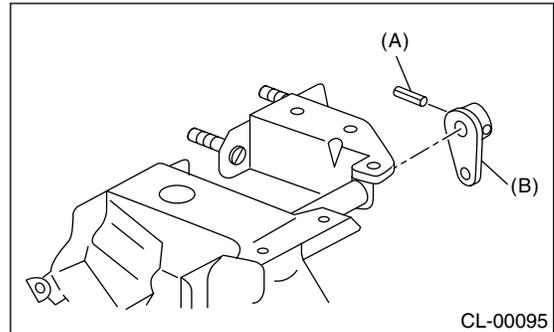


- (A) Pin
- (B) Lever

- 3) Remove the clutch pedal and bushings.

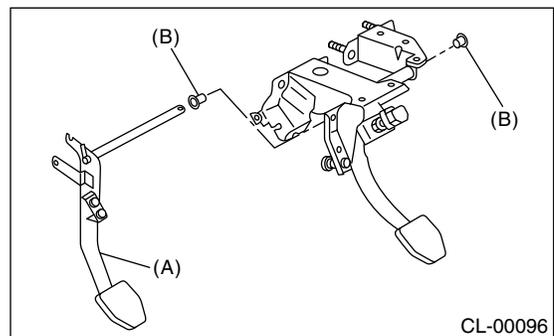

- (A) Clutch pedal
- (B) Bushing

4) Remove the stopper, clip, O-ring, rod S, and then remove the spring and bushing S.

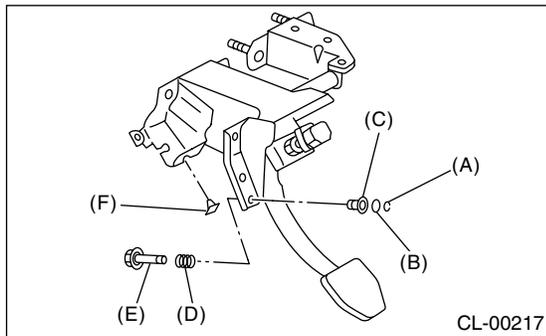


- (A) Clip
- (B) O-ring
- (C) Bushing S
- (D) Spring S
- (E) Rod S
- (F) Stopper

Play of clutch pedal:

Service limit

5.0 mm (0.197 in) or less

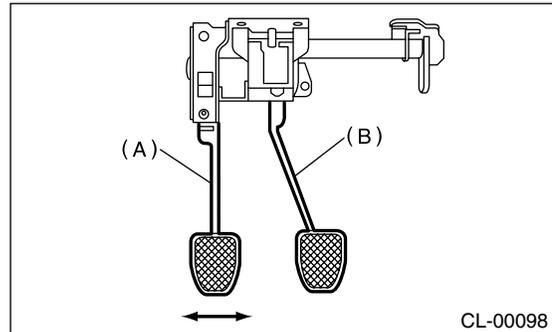

- (A) Clutch pedal
- (B) Brake pedal

5) Remove the stoppers from clutch pedal.

6) Remove the clutch pedal pad. (Non-turbo model)

D: ASSEMBLY

1) Attach the stopper, etc. to pedal bracket temporarily.

2) Clean inside of bores of clutch pedal and brake pedal, apply grease, and set bushings into bores.

3) Align bores of pedal bracket, clutch pedal and brake pedal, attach the brake pedal return spring, assist rods, spring, and bushing.

NOTE:

Clean up inside of bushings and apply grease before installing the spacer.

E: INSPECTION

1. CLUTCH PEDAL

Move the clutch pedal pads in the lateral direction with a force of approximately 10 N (1 kgf, 2 lb) to ensure pedal play is in specified range.

CAUTION:

If excessive movement is noted, replace the bushings with new ones.

CLUTCH PEDAL

CLUTCH SYSTEM

F: ADJUSTMENT

1. CLUTCH PEDAL

1) Turn the lock nuts until clutch pedal full stroke length is within specifications.

CAUTION:


Do not attempt to turn the clutch switch to adjust clutch pedal full stroke length.

NOTE:

If lock nuts cannot adjust the clutch pedal full stroke length to specifications, turn the master cylinder push rod to adjust it.

Specified clutch pedal full stroke: A
130 — 135 mm (5.12 — 5.31 in)


Tightening torque (Clutch switch lock nut):
T: 8 N·m (0.8 kgf-m, 5.8 ft-lb)

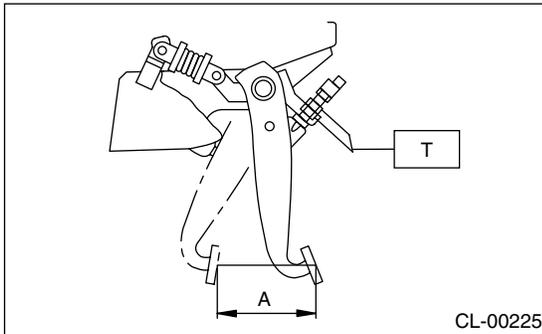

CL-00225

2) Turn the master cylinder push rod so that clevis pin moves to the left and then to the right. Clevis pin must move without resistance while it is rattling.

Tightening torque (Push rod lock nut):
T: 10 N·m (1.0 kgf-m, 7 ft-lb)

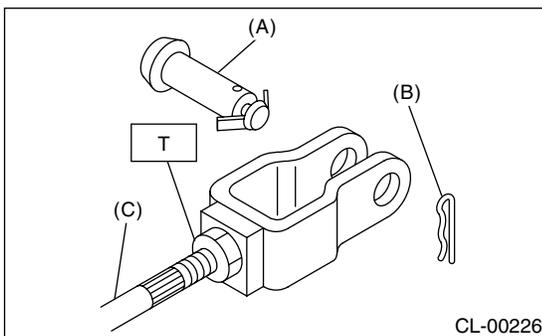

CL-00226

- (A) Clevis pin
- (B) Snap pin
- (C) Push rod


3) Depress and release the clutch pedal two to three times to ensure that clutch pedal and release fork operates smoothly. If the clutch pedal and release fork do not operate smoothly, bleed air from the clutch hydraulic system. <Ref. to CL-24, Clutch Fluid Air Bleeding.>

4) Measure the clutch pedal full stroke length again to ensure that it is within specifications. If it is not, repeat adjustment procedures again from the beginning.

Specified clutch pedal full stroke:
130 — 135 mm (5.12 — 5.31 in)

5) Move the clevis pin to the left and then to the right. It should move without resistance while it is rattling. If resistance is felt, repeat adjustment procedures again from the beginning.


6) Push the release lever until operating cylinder push rod retracts. Ensure that clutch fluid level in reservoir tank increases. If the clutch fluid level increases, the hydraulic clutch is properly adjusted; if fluid level does not increase or push rod does not retract, replace the master cylinder with a new one. <Ref. to CL-20, Master Cylinder.>

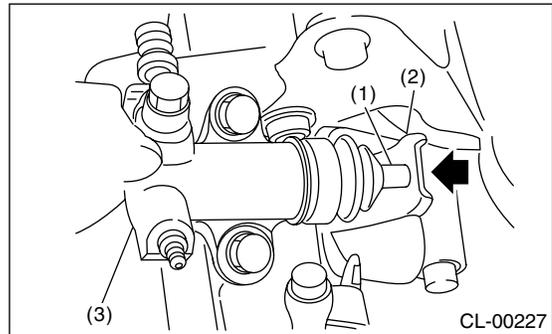

CL-00227

- (1) Push rod
- (2) Release lever
- (3) Operating cylinder

7) Push the release lever until operating cylinder push rod retracts. Check that the clutch fluid level in reservoir tank increases.

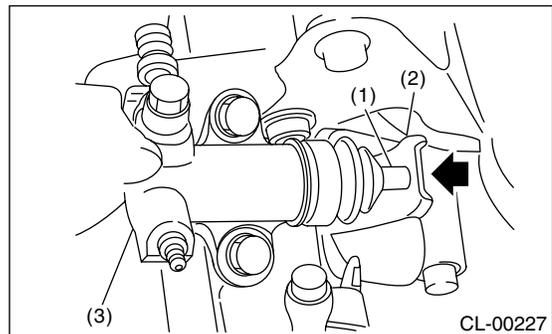

CL-00227

- (1) Push rod
- (2) Release lever
- (3) Operating cylinder


8) If the clutch fluid level increases, hydraulic clutch play is correct.

9) If the clutch fluid level does not increase or push rod does not retract, clutch pedal must be readjusted.

10) Check the fluid level on the outside of the reservoir tank. If the level is below "MIN", add clutch fluid to bring it up to "MAX".

Recommended clutch fluid:

FMVSS No. 116, fresh DOT 3 or DOT 4 brake fluid

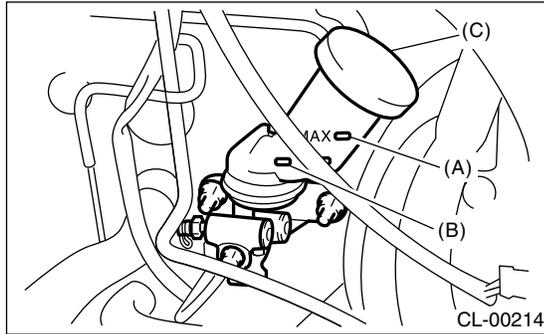

- (A) Max. level
- (B) Min. level
- (C) Reservoir tank